




Transponder Modulator

Gigabit Ethernet L-Band

MDS-PAQB-221

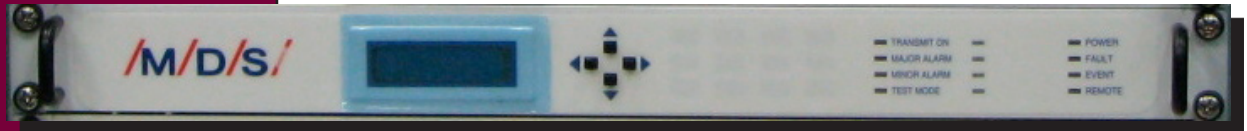

Input Interface

- Combined ASI/SPI and Ethernet interface:
- 2x ASI input on BNC (F) - 75 ohms (coax)
- 2x ASI output (loop through) on BNC (F) - 75 ohms (coax)
- SPI on 25 pin D-sub connector
- Optical ASI on ST (optional)
- 50 and 75 Ω versions
- Auto-switching 10/100/1000 Base-T Ethernet
- Transport stream on IP (UDP / RTP)
- DVB-SE Multi-stream support

Modulation

- Baud rate range
- DVB-S2 0.256 - 68 Mbaud
- DVB-S/DSNG 1 - 45 Mbaud
- DVB-S/DSNG:
- QPSK: 1/2, 2/3, 3/4, 5/6, 7/8
- 8PSK: 2/3, 5/6
- DVB-S2:
- QPSK: 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
- 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10
- 16APSK: 2/3, 3/4, 5/6, 8/9, 9/10
- 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10



Output Interface

- Connector: SMA (F), 50 ohms
- Output Power: -50 to 0 dBm (± 2 dB)
- Frequency: 950 - 2050 MHz (50 Hz steps)

Electrical Specs

- Power supply: 90-130 and 180-260 VAC, 105 VA, 47-63 Hz
- Housing: 1 RU, 510 mm deep
- Weight: 6 kg
- Temperature: 0 to 40 C operational, -40 to 70 C storage
- Humidity: 5% to 85% non-condensing

MDS America, Inc.
800 SE Lincoln Avenue
Stuart, FL 34994
United States of America

www.mdsamerica.com

+1 772 463 8338